



AVAILABILITY

Shotmaster c/Classic	Shotmaster s/Classic	Shotmaster ms/Classic
2 outlets	2 outlets	2 outlets

OPTIONS ACCESSORIES

Lockable Lids

LOGO (on the side panel of the equipment)

Standard: No logo

Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 218 x 595 x 490 mm (8.6 x 23.4 x 19.3 in)

Weight: 23 kg

Powder containers: 2 x 1.5 kg

Hardware configuration: Enigma pre-configuration necessary

Mechanical configuration: Enigma with E'choco predisposition

Software: V3.x and higher

Voltage: 24 V provided by the Enigma

Installation specifications: Only setup on the left side of the Enigma. For use with Enigma machines only

v19_04.23_en



AVAILABILITY

Shotmaster c/Classic	Shotmaster s/Classic	Shotmaster ms/Classic
-	-	•

OPTIONS ACCESSORIES

Milk container 2 x 4.5 Liter

LOGO (on the side panel of the equipment)

Standard: No logo

Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 283 mm x 631 mm x 490 mm (11.10 in x 24.80 in x 19.30 in)

Weight: 34 kg

Internal fridge volume: 13 L

Milk container - 1 milk type container: 9 L

Milk container - 2 milk types container (option): 2 x 4.5 L

Storage for up to: 24 espresso cups


Power consumption: Up to 75 W

Refrigerant: R600a

Temperature Control: Digital thermostat with temperature display

Installation specifications: Setup on the right side of the Enigma

v19_04.23_en

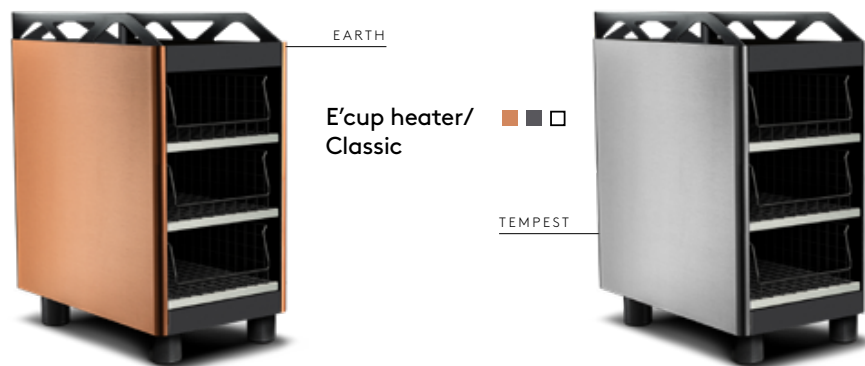

AVAILABILITY

Shotmaster c/Classic	Shotmaster s/Classic	Shotmaster ms/Classic
•	•	•

LOGO (on the side panel of the equipment)

Standard: No logo

Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 283 x 631 x 490 mm (11.1 x 24.8 x 19.3 in)

Weight: 24 kg

Heatable levels: Four

Removable drawers: Three inox drawers

Storage for up to: 180 espresso cups

Power consumption: Up to 140 W

Installation specifications: Setup on the right or on the left side of the Shotmaster

v19.04.23_en



AVAILABILITY

Shotmaster c/ST	Shotmaster s/ST	Shotmaster ms/ST	Shotmaster s-pro/ST	Shotmaster ms-pro/ST
2 outlets	2 outlets	2 outlets	2 outlets	2 outlets

OPTIONS ACCESSORIES

Lockable Lids

LOGO (on the side panel of the equipment)

Standard: Enigma logo

Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 227 x 735 x 557 mm (8.9 x 28.9 x 21.9 in)

Weight: 28 kg

Powder containers: 2 x 1.5 kg

Hardware configuration: Enigma pre-configuration necessary

Mechanical configuration: Enigma with E'choco predisposition

Software: V3.x and higher

Voltage: 24 V provided by the Enigma

Installation specifications: Only setup on the left side of the Enigma. For use with Enigma machines only

v19.04.23_en



CHARCOAL

E'fridge/ST



AVAILABILITY

Shotmaster c/ST	Shotmaster s/ST	Shotmaster ms/ST	Shotmaster s-pro/ST	Shotmaster ms-pro/ST
-	-	•	-	•

OPTIONS ACCESSORIES

Milk container 2 x 4.5 Liter	•
------------------------------	---

LOGO (on the side panel of the equipment)

Standard: Enigma logo
Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 292 x 735 x 557 mm (11.5 x 28.9 x 21.9 in)
Weight: 39 kg
Internal fridge volume: 13 L
Milk container - 1 milk type container: 9 L
Milk container - 2 milk types container (option): 2 x 4.5 L
Storage for up to: 24 espresso cups
Power consumption: 75 W (cup heater on) / 45 W (cup heater off)
Refrigerant: R600a
Thermostat Digital with temperature display
Installation specifications: Setup on the right side of the Enigma

v19_04.23_en



CHARCOAL

E'cup heater/ST



AVAILABILITY

Shotmaster c/ST	Shotmaster s/ST	Shotmaster ms/ST	Shotmaster s-pro/ST	Shotmaster ms-pro/ST
•	•	•	•	•

LOGO (on the side panel of the equipment)

Standard: Enigma logo
Option: Shotmaster logo

SPECIFICATIONS

Dimensions (W/H/D): 292 x 735 x 557 mm (11.5 x 28.9 x 21.9 in)
Weight: 29 kg
Heatable levels: Four
Removable drawers: Three inox drawers
Storage for up to: 180 espresso cups
Power consumption: Up to 140 W
Installation specifications: Setup on the right or on the left side of the Shotmaster

v19_04.23_en